



RKDOORSYSTEMS

## ES2450 Concealed Hinge Adjustment Instructions

### Adjusting options


- Perform adjustments with the unit installed.
- Be sure to adjust all door hinges synchronously
- When adjusting the height, ensure that the load is evenly distributed between the hinges.

#### Tool required

TX15 Allen key

#### Height adjustment

+ 4 mm  
- 2 mm

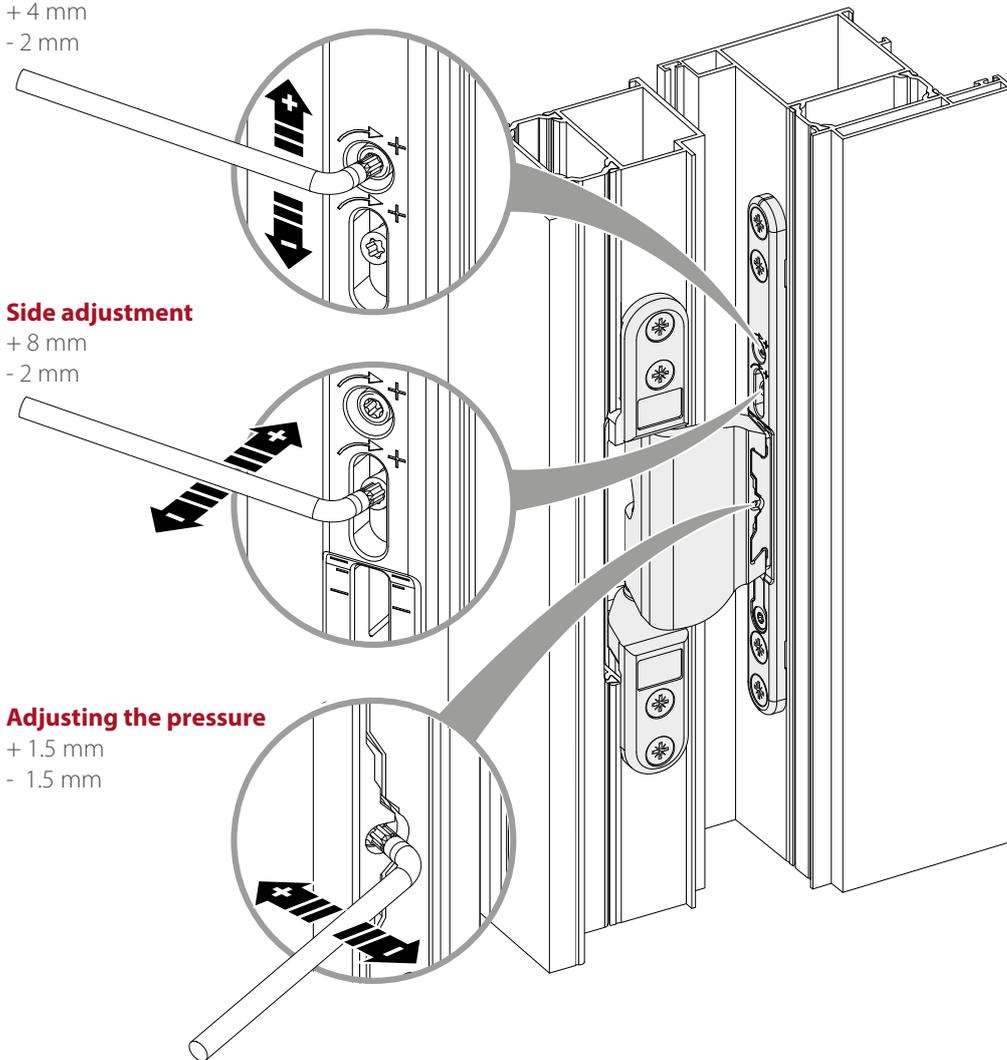

#### Side adjustment

+ 8 mm  
- 2 mm

#### Adjusting the pressure

+ 1.5 mm  
- 1.5 mm